



Phone No: 0467 2260632  
Email: rarspil@kau.in

**KERALA AGRICULTURAL UNIVERSITY**  
**Regional Agricultural Research Station, Pilicode**  
**Kasaragod Dist – 671310**

No.B2-4783/2021(i)

Dated: 31.12.2021

**TENDER NOTICE**

Tender Number	B2-4783/2021(i)
Tender Cost	Rs. - 449/-
GST (18%)	Rs.81/-
Amount of EMD to be paid	Rs.2243/-
Last date and time for receipt of tender	12 /01/2022 3.00 PM
Last date and time for opening of tender	12/01/2022 3.30 PM
Date up to which the rates are to remain firm for acceptance	Up to 31/03/2022
Designation and address of officer to whom the quotation is to be addressed	<b>The Associate Director, Regional Agricultural Research Station (North Zone) Pilicode – 671310</b>
Place of Supply	<b>RARS Pilicode</b>
Superscription: <b>“Tender for construction of New entrance gate for Thirumunbu Bhavanam”</b>	

Sealed competitive tenders are invited for the construction of New Entrance gate for Thirumunbu Bhavanam at RARS Pilicode

DETAILED ESTIMATE								
Name of work: Proposed New entrance gate for Thirumunp at RARS, Pilicode								
1	2.6.1 Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including disposal of excavated earth, lead up to 50 m and lift up to 1.5 m, disposed earth to be levelled and neatly dressed. All kinds of soil							
	Gate pillar	3	1.500	1.500	1.500	1.0	10.13	
							Total Quantity	10.13
	say	10.13	cum	210.02	/cum			
2	4.1.8 Providing and lay ing in positi on cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth lev el: 1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40 nominal size)							
	Gate pillar	3	1.500	1.500	0.100	1.0	0.675	cum
							total	0.675 cum
	say	0.68	cum	6687.210	/cum			

3	5.2.2 Reinforced cement concrete walls (any thickness) , including attached pilasters, butresses, plinth and string courses, fillets, columns, pillars, piers , abutments, post and struts etc. up to floor five level excluding cost of centering shuttering , finishing and reinforcement 1:1.5:3 ( 1 cement :1.5 coarse sand: 3graded stone aggregate 20mm nominal size).								
	Gate pillar	3	1.200	1.200	0.200	1.0	0.864		
	2nd	3	0.600	0.600	0.300	1.0	0.324		
	Pillar	3	0.400	0.400	3.000	1.0	1.440		
	total							2.628	cum
	say	2.628	cum	10748.82	/ cum				
4	5.22.6 Steel reinforcement for R.C. C work including straightening, cutting, bending, placing in position and binding all complete upto plinth level Thermo - Mechanically Treated bars of grade Fe500 D or more								
	quantity from sl no.3	1	2.628			140.0	367.92		
	total							367.92	kg
	say	368	kg	94.84	/ kg				
5	5.9.2 Centering and shuttering including strutting, etc. and removal of form for: Walls ( any thickness) including attached pilasters, butresses, plinth and string courses etc.								
	Gate pillar	3	1.6	3	rtment	1.0	14.40		
	total							14.40	sqm
	say	14.4	sqm	703.77	/ sqm				
6	od 43950/2021-2022 null Laterate masonry with neatly dressed laterate stone of size 30x20x20cm or nearest size in cement mortar 1: 6 for foundation and base ment including all cost of materials, labour charges etc.								
	Compound wall	1	10.000	0.300	0.600	1.0	2.592		
	total							2.592	
	say	2.592	cum	5673.950	cum				
7	od43949/ 2021-2022 null Laterate masonry with neatly dressed laterate stone of size 30x20x20cm or nearest size including all cost of materials, labour charges etc.								
	Compound wall	1	10.000	0.200	1.800	1.0	3.600		
	total							3.600	cum
	say	3.6	cum	6407.140	/cum				
8	13.1.1 12 mm cement plaster of mix: 1:3 ( 1 cement : 3 fine sand )								
	Gate pillar	3	1.600	3.000		1.0	14.40		
	Compound wall	1	10.000	3.800		1.0	38.00		
	T total Quantity							52.40	
	say	52.40	sqm	308.22	/sqm				
9	10.16.2 Steel work built up tubular ( round , square or rectangular hollow tubes) trusses etc, including cutting , hoisting, fixing position and applying priming coat of approved steel primer , including welding and bolted with special shaped washer etc. complete. Hot finished seamless type tubes.								
	gate	1	6	1.8	20		216.00	kg	
	wicket gate	1	1.2	1.5	20		36.00		
	over compound wall	1	10	0.6	15		90.00		
	total							342.00	kg
	say	342.00	kg	181.89	/kg				
10	13.48.1 finishing with Delux multisurface paint system for interior and exterior using primer as per manufacture specification : two or more coat applied on walls @ 1.25ltr/10sqm over and including one coat of special primer applied @ 0.75ltr/ 10sqm								
	same qty for plaster area							171.42	sqm
	say	171.42	sqm	164.22	sqm				

## Terms and conditions

### 1. Tender form

The Tender form shall be downloaded from the following link in the internet- [www.kau.in/tenders](http://www.kau.in/tenders) OR [rarspil.kau.in/tenders](http://rarspil.kau.in/tenders). The same should be submitted duly signed along with other documents.

2. **Earnest Money Deposit:** An EMD of **Rs.2243/-** should be remitted by separate DD drawn in favour of Associate Director, Regional Agricultural Research Station, Pilicode Pin-671310.
3. The cost of tender form, GST and EMD will be accepted by way of separate DDs in favour of Associate Director, Regional Agricultural Research Station, Pilicode, Pin 671310.

### Agreement:-

4. The tender should be accompanied by an Agreement in Kerala stamp paper worth Rs.200/-(Rupees Two hundred only) in the format that can be downloaded from the website [www.kau.edu/tenders](http://www.kau.edu/tenders) OR [rarspil.kau.in/tenders](http://rarspil.kau.in/tenders).
5. The sealed cover containing the tender documents should be super scribed as "Tender for construction of new entrance gate for Thirumunbu Bhavanam"-- **The cover should contain the DDs for tender cost, GST, EMD and the Agreement as mentioned above.**
6. The successful tenders should execute an agreement in Kerala Stamp paper worth Rs.200/-(Rupees Two hundred only) and furnish a security deposit of 5% of cost of the rate quoted in the form of term deposit/bank guarantee/demand draft drawn in favour of Associate Director, Regional Agricultural Research Station, Pilicode, Pin 671310, Kasargod, District payable at the State Bank of India, Kayyur (Branch code SBTR000573), when directed from this office.
7. The rate, tax and other charges if any should be separately stated.
8. The Associate Director has the right to accept or reject any or all of the offers without assigning any reason.
9. The successful tenderer shall initiate the work/supply the item within one week of award and should finish the supply within one month.
10. If any hartal/strike/any unexpected holiday occurs on the date of opening of tender, the tender will be opened at the same time on the next working day.
11. All the rules and regulation applicable to government tender will be applicable to this tender also.


\*Enquiries if any may be mailed to [rarspil@kau.in](mailto:rarspil@kau.in) or contact 04672260632 during office hours.


Sd/-  
Dr.Vanaja T  
Associate Director

- To: 1. Notice Board/KAU website ✓  
2. Sri.Surendran P V, Farm Superintendent (Thirumunbu Project)  
3. Panchayath Office, Pilicode/Cheruvathur  
4. Nileshwaram Municipality.

ASSOCIATE DIRECTOR  
REGIONAL AGRIL. RESEARCH STATION (NZ)  
KERALA AGRICULTURAL UNIVERSITY  
PILICODE - 671310

//Approved for issue//

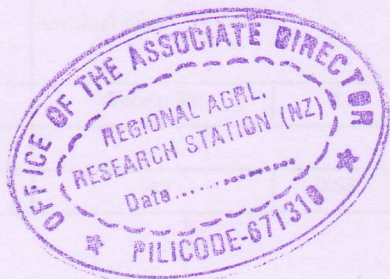

  
Section Officer